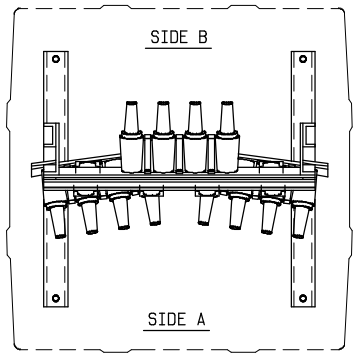

TOP VIEW

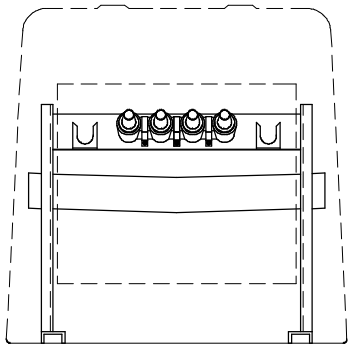

SIDE B

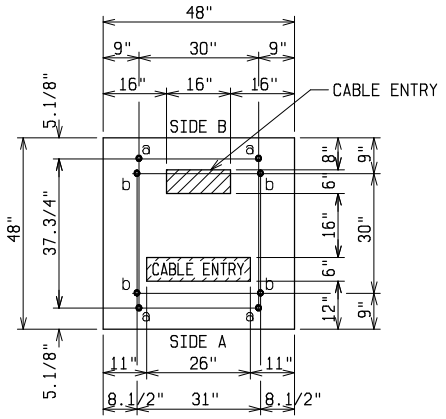

PAD AND ANCHOR BOLT DIMENSIONS

ANCHOR BOLTS TO BE 5/8" DIA. AND TO EXTEND: a = 1-1/2"
b = 2-1/2"

PROVIDE CABLE ENTRY AS REQUIRED.

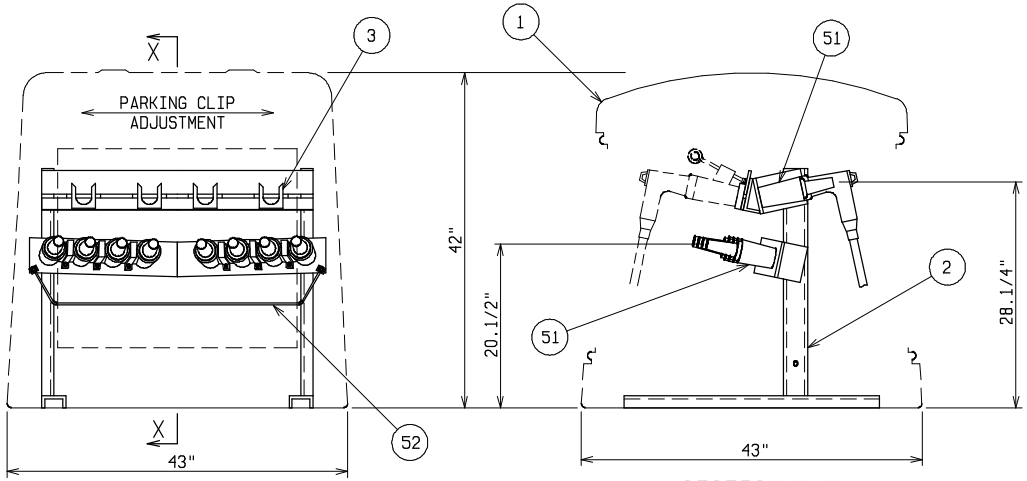

SIDE A

SECTION X-X



SCHEMATIC

MATERIAL LIST - STANDARD UNIT

ITEM	DESCRIPTION
1	FIBERGLASS EQUIPMENT ENCLOSURE - 2 DOOR - STANDARD GREEN STAINLESS STEEL HARDWARE - PDI MODEL PE2-43
2	GALVANIZED STEEL FREE STANDING FRAME
3	STAINLESS STEEL ADJUSTABLE LOCATION PARKING CLIP

OPTIONAL EQUIPMENT

51	200 AMP LOADBREAK JUNCTION - SPECIFY MANUFACTURER, VOLTAGE AND 2, 3, OR 4-WAY
52	3/8" DIA. COPPER GROUND BUS
53	LOUVER GROUNDING (NOT SHOWN)

SWITCHGEAR - DEADFRONT

15/25KV 200 AMP 95/125KV BIL

THREE PHASE 2, 3, OR 4-WAY LOADBREAK JUNCTION

POWER DESIGN INC.
ODELL, OREGON

DRAWN:	PAGE	DATE	DRAWING NO.
BB		3-12-92	1021 -R1

FILE REF: