

MATERIAL LIST - STANDARD UNIT	
ITEM	DESCRIPTION
1	POWER DESIGN INC MODEL NO CJPF-35/A FIBERGLASS CABLE JUNCTION PEDESTAL - MUNSELL GREEN
2	ALUMINUM JUNCTION MOUNTING BAR AND PARKING CLIP MOUNTING RAILS
3	ADJUSTABLE LOCATION STAINLESS STEEL PARKING CLIPS


OPTIONAL EQUIPMENT	
51	600 AMP DEADBREAK JUNCTION - SPECIFY MANUFACTURER, VOLTAGE AND 2, 3, OR 4-WAY

NOTE:

1. ORDERING INFORMATION:
 USER SHOULD SELECT 'D', TERMINAL HEIGHT, DESIRED. SPECIFY 'A', OVERALL HEIGHT, AS A SUFFIX TO THE BASIC PART NO. i.e.; CJPF-35/A-30 = 30' OVERALL HEIGHT

2. MATERIAL:
 1) FIBERGLASS LAMINATE 3/16" NOMINAL THICKNESS
 2) EXTERIOR UV STABILIZED GELCOAT - 14 MIL NOMINAL THICKNESS - WHITE INTERIOR
 3) FIRE RETARDANT - DOES NOT SUPPORT COMBUSTION
 4) STAINLESS STEEL HARDWARE

3. MOUNTING BAR WILL WITHSTAND A MINIMUM 400 LB. LOADING TO INSTALL OR REMOVE ELBOWS.

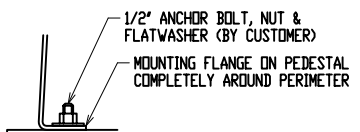

MODEL No.	OVERALL HEIGHT	OVERALL WIDTH AT BOTTOM	OVERALL DEPTH AT BOTTOM	JUNCTION TERMINAL HEIGHT
	A	B	C	D
CJPF-35/A-30	30'	66.1/4'	37.1/2'	15.1/4'
CJPF-35/A-41	41'	68.1/2'	39.3/4'	26.1/4'


DEADFRONT CABLE JUNCTION PEDESTAL

15/25KV 600 AMP 95/125KV BIL

THREE PHASE 2, 3, OR 4-WAY DEADBREAK JUNCTION

POWER DESIGN INC.
 ODELL, OREGON

DRAWN: RB	PAGE	DATE: 3-29-04	DRAWING NO. 3387-R1
-----------	------	---------------	---------------------

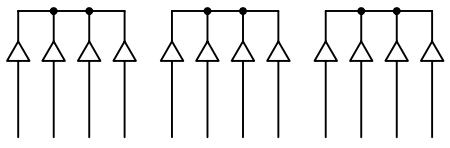

FILE REF: