



MATERIAL LIST - STANDARD UNIT	
ITEM	DESCRIPTION
1	POWER DESIGN INC MODEL NO CJPF-35/S FIBERGLASS CABLE JUNCTION PEDESTAL - MUNSELL GREEN
2	ALUMINUM JUNCTION MOUNTING BAR AND MOUNTING CLIPS
3	STAINLESS STEEL PARKING CLIPS
OPTIONAL EQUIPMENT	
51	200 AMP LOADBREAK JUNCTION - SPECIFY MANUFACTURER, VOLTAGE AND 2, 3, OR 4-WAY

NOTE:

1. **ORDERING INFORMATION:**
 USER SHOULD SELECT 'D', TERMINAL HEIGHT, DESIRED. SPECIFY 'A', OVERALL HEIGHT, AS A SUFFIX TO THE BASIC PART NO. i.e.; CJPF-35/S-30 = 30" OVERALL HEIGHT

2. **MATERIAL:**
 1) FIBERGLASS LAMINATE 3/16" NOMINAL THICKNESS
 2) EXTERIOR UV STABILIZED GELCOAT - 14 MIL NOMINAL THICKNESS - WHITE INTERIOR
 3) FIRE RETARDANT - DOES NOT SUPPORT COMBUSTION
 4) STAINLESS STEEL HARDWARE

3. MOUNTING BAR WILL WITHSTAND A MINIMUM 400 L.B. LOADING TO INSTALL OR REMOVE ELBOWS.

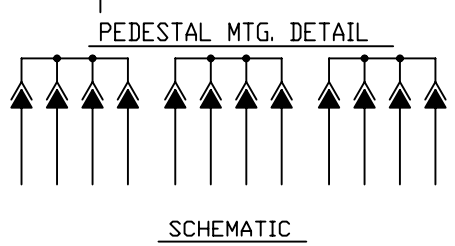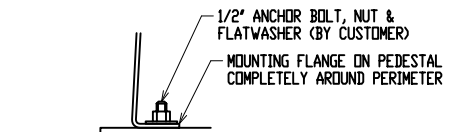

MODEL No.	OVERALL HEIGHT	OVERALL WIDTH AT BOTTOM	OVERALL DEPTH AT BOTTOM	JUNCTION TERMINAL HEIGHT
	A	B	C	D
CJPF-35/S-30	30"	66.1/4"	37.1/2"	15"
CJPF-35/S-41	41"	68.1/2"	39.3/4"	26"

DEADFRONT CABLE JUNCTION PEDESTAL

15/25KV 200 AMP 95/125KV BIL
 THREE PHASE 2, 3, OR 4-WAY LOADBREAK JUNCTION

POWER DESIGN INC.
 ODELL, OREGON

DRAWN RB	PAGE	DATE 3-29-04	DRAWING NO. 3380-R1
-------------	------	-----------------	------------------------

FILE REF: