
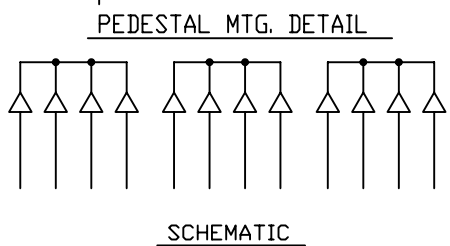


MATERIAL LIST - STANDARD UNIT	
ITEM	DESCRIPTION
1	POWER DESIGN, INC. MODEL NO. CJPF-35/S FIBERGLASS CABLE JUNCTION PEDESTAL - MUNSELL GREEN
2	ALUMINUM JUNCTION MOUNTING BAR AND MOUNTING CLIPS
3	STAINLESS STEEL PARKING CLIPS

OPTIONAL EQUIPMENT	
51	600 AMP DEADBREAK JUNCTION - SPECIFY MANUFACTURER, VOLTAGE AND 2, 3, OR 4-WAY

- NOTE:**
- ORDERING INFORMATION:**  
USER SHOULD SELECT 'D', TERMINAL HEIGHT, DESIRED. SPECIFY 'A', OVERALL HEIGHT, AS A SUFFIX TO THE BASIC PART NO. i.e., CJPF-35/S-30 = 30' OVERALL HEIGHT
  - MATERIAL:**
    - FIBERGLASS LAMINATE 3/16" NOMINAL THICKNESS
    - EXTERIOR UV STABILIZED GELCOAT - 14 MIL NOMINAL THICKNESS - WHITE INTERIOR
    - FIRE RETARDANT - DOES NOT SUPPORT COMBUSTION
    - STAINLESS STEEL HARDWARE
  - MOUNTING BAR WILL WITHSTAND A MINIMUM 400 LB. LOADING TO INSTALL OR REMOVE ELBOWS.



MODEL No.	OVERALL HEIGHT	OVERALL WIDTH AT BOTTOM	OVERALL DEPTH AT BOTTOM	JUNCTION TERMINAL HEIGHT
	A	B	C	D
CJPF-35/S-30	30'	66.1/4'	37.1/2'	15'
CJPF-35/S-41	41'	68.1/2'	39.3/4'	26'

**DEADFRONT CABLE JUNCTION PEDESTAL**

15/25KV      600 AMP      95/125KV BIL  
THREE PHASE      2, 3, OR 4-WAY DEADBREAK JUNCTION



DRAWN: RB	PAGE	DATE: 3-29-04	DRAWING NO.: 3389-R1
-----------	------	---------------	----------------------

FILE REF: