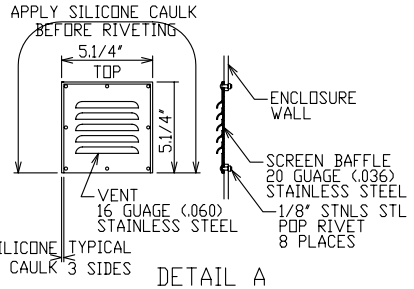

DETAIL A

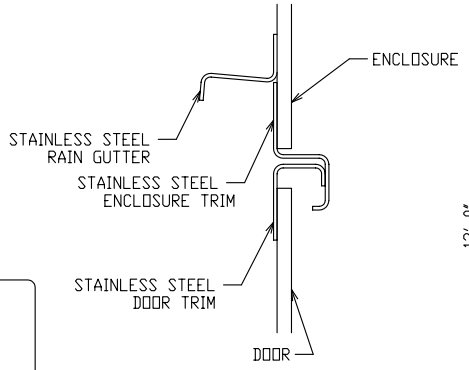

SECTION Z-Z

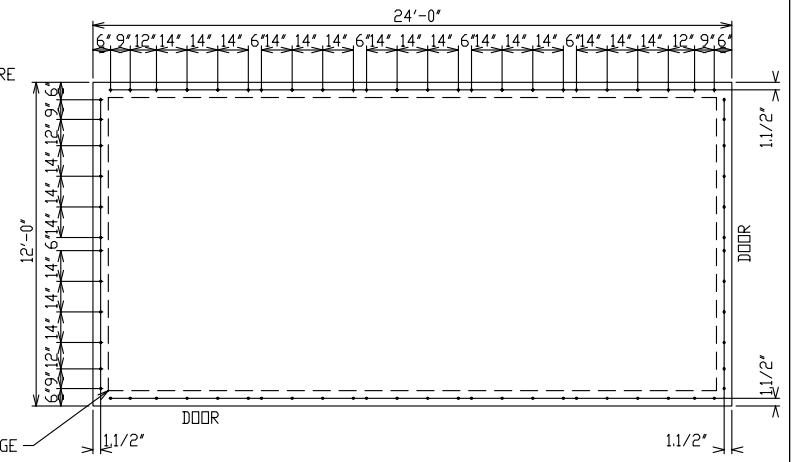

BOLT DETAIL

ANCHOR BOLTS TO BE 5/8" DIA. & TO EXTEND
1-1/2" MINIMUM ABOVE PAD.
PROVIDE UTILITY ENTRY AS REQUIRED.

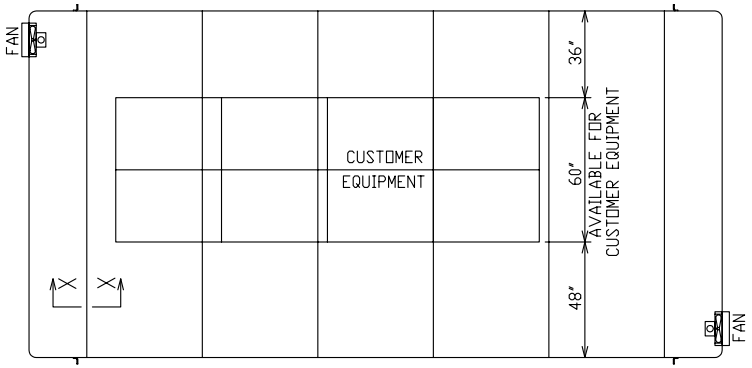

PLAN VIEW

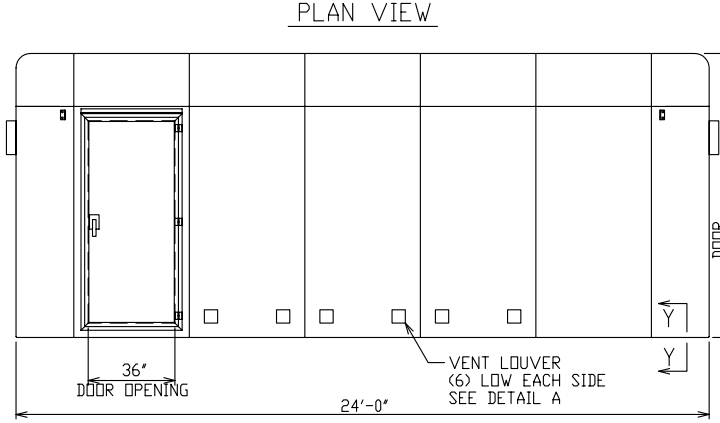

FRONT VIEW

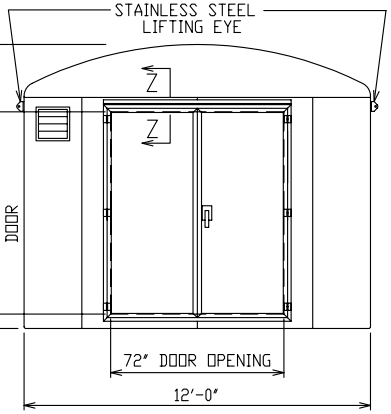

END VIEW

ORDERING INFORMATION:

ME 3 - 144 - 3498 - L1 - LG

- MODEL
- NUMBER OF DOORS
- NOMINAL WIDTH
- DETAILS AS SHOWN ON THIS DRAWING
- COLOR
  - LG - LIGHT GRAY
  - WG - LIGHT GREEN
  - MG - MUNSELL GREEN
  - OTHER COLORS AVAIL. CONSULT FACTORY
- L1 - PROVISION FOR PADLOCKING ONLY
- L2 - PROVISION FOR PADLOCKING & PENTA HEAD BOLT
- L4 - PROVISION FOR PADLOCKING, PENTA HEAD BOLT & INNER DOORS

NOTE:

1. MATERIAL:
   1) FIBERGLASS LAMINATE 1/4" NOMINAL THICKNESS
   2) EXTERIOR UV STABILIZED GELCOAT - 14 MIL NOMINAL THICKNESS
   3) FIRE RETARDANT - DOES NOT SUPPORT COMBUSTION
   4) STAINLESS STEEL HARDWARE

2. STANDARDS:
   1) CERTIFIED TEST DATA OF ASTM STRUCTURAL STANDARDS AVAILABLE UPON REQUEST

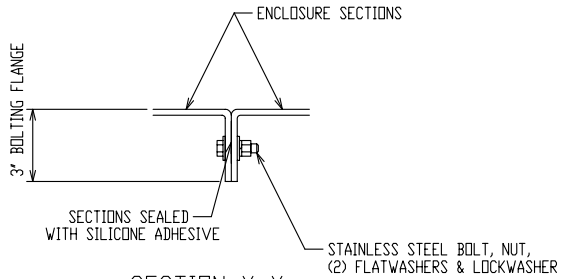

SECTION X-X

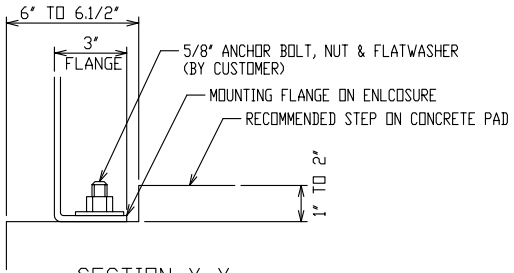

SECTION Y-Y

FILE REF:

FIBERGLASS MODULAR ENCLOSURE

12 FT WIDE x 9 FT 10 IN HIGH x 24 FT LONG

ONE MAN & ONE DOUBLE DOOR (2) EXHAUST FAN (12) INTAKE LOUVERS

POWER DESIGN INC.
ODELL, OREGON

DRAWN:	PAGE	DATE	DRAWING NO.
BB		5-8-06	3498